

60 ÖKOALPIN

WOOD STOVE



Measurements (W x D x H): 600 x 600 x 850-910 mm
 Nominal heating power: 6 kW
 Heating efficiency: 80,2%
 Patented adjustable multiple smoke outlet
 Available with door stop left or right



Optional



PANORAMA
 Black F5
 Reinforcement Black F5 (optional)



TREND
 Stainless steel



DEKOR
 ST21 rendered



PANORAMA
 Stainless steel
 With flue outlet valve




60 ÖKOALPIN

WOOD STOVE

Technical data (Data may vary depending on type of fuel used)

Fuel	Wood
Energy efficiency class	A+
Nominal heating power	6 kW
Heating efficiency	80,2 %
η_s Seasonal space heating energy efficiency	71,2 %
Diameter smoke outlet	Ø 120 mm
Minimum draught	12 Pa / 0,12 mbar
Temperature smoke outlet	265 °C
Smoke mass	8,3 g/s
CO at 13% O ₂	0,07 %
Weight	140 kg
Possible smoke outlets	8
Test report	CPD-11-025
VKF AEA1 - No.	16684
Firebox opening version Trend/Dekor (L x H)	200 x 165 mm
Firebox opening version Panorama (L x H)	205 x 180 mm
Combustion chamber (L x D x H)	210 x 320 x 260 mm
Drawer (L x D x H)	340 x 420 x 290 mm
Oven (L x D x H)	-
Hob (L x D)	500 x 500 mm
Diameter external air intake	Ø 80 mm
CO at 13% O ₂ (Carbon monoxide) / NO _x (Nitrogen oxide)	857,0 mg/Nm ³ / 58,0 mg/MJ
Dust / OGC (Organic compounds)	39,0 mg/Nm ³ / 43,0 mg/MJ

NB: Available with door stop left or right

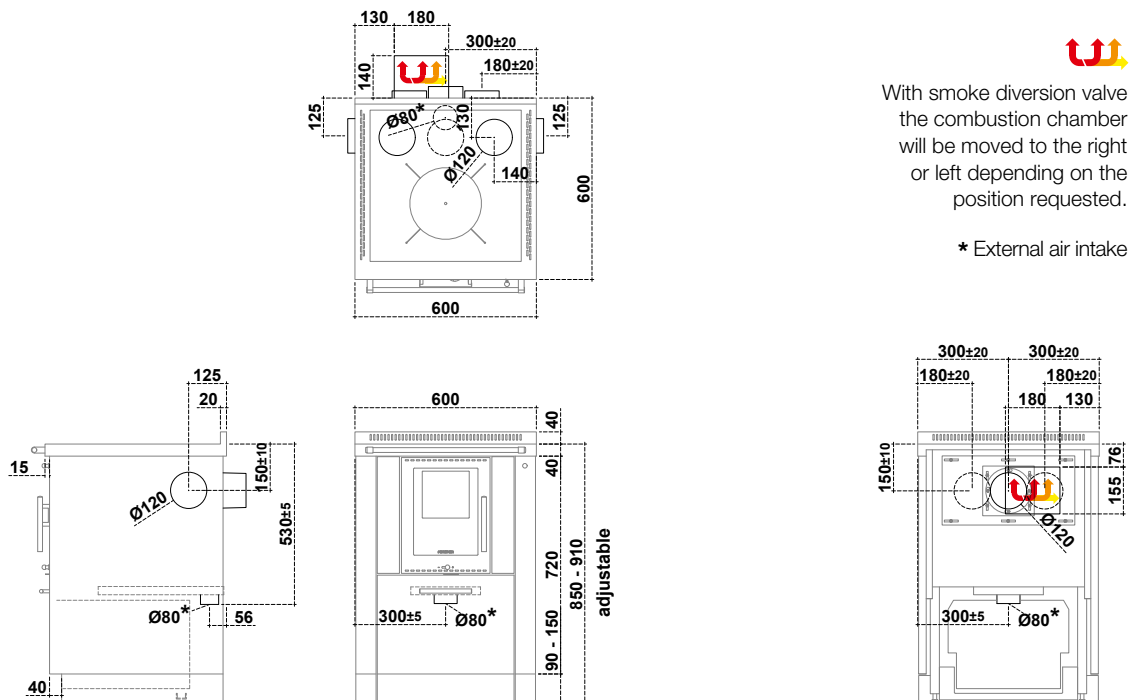

With smoke diversion valve the combustion chamber will be moved to the right or left depending on the position requested.

* External air intake

WARNING:

Minimum safety distance from flammable materials

From the rear and side connection to the chimney **P= 0 + 40* mm**
Following agreement with chimney sweep

* 40mm of insulation with heat conductivity equal to 0.07 W/mK at 200°C

On the side above the plate	L= 500 mm
On the side below the plate	L= 3 mm
Above the plate	Min. 750 mm
In the front from the middle of the fire door	R= 250 mm
Plate for floor protection	Based on specific country directives

