

60 ÖKOALPIN

WOOD STOVE



Measurements (W x D x H): 600 x 600 x 850-910 mm
 Nominal heating power: 6 kW
 Heating efficiency: 80,2%
 Patented adjustable multiple smoke outlet
 Available with door stop left or right



Optional



PANORAMA
 Black F5
 Reinforcement Black F5 (optional)



TREND
 Stainless steel



DEKOR
 ST21 rendered



PANORAMA
 Stainless steel
 With flue outlet valve




60 ÖKOALPIN

WOOD STOVE

Technical data (Data may vary depending on type of fuel used)

| | |
|---|---------------------------------------|
| Fuel | Wood |
| Energy efficiency class | A+ |
| Nominal heating power | 6 kW |
| Heating efficiency | 80,2 % |
| η_s Seasonal space heating energy efficiency | 71,2 % |
| Diameter smoke outlet | Ø 120 mm |
| Minimum draught | 12 Pa / 0,12 mbar |
| Temperature smoke outlet | 265 °C |
| Smoke mass | 8,3 g/s |
| CO at 13% O ₂ | 0,07 % |
| Weight | 140 kg |
| Possible smoke outlets | 8 |
| Test report | CPD-11-025 |
| VKF AEA1 - No. | 16684 |
| Firebox opening version Trend/Dekor (L x H) | 200 x 165 mm |
| Firebox opening version Panorama (L x H) | 205 x 180 mm |
| Combustion chamber (L x D x H) | 210 x 320 x 260 mm |
| Drawer (L x D x H) | 340 x 420 x 290 mm |
| Oven (L x D x H) | - |
| Hob (L x D) | 500 x 500 mm |
| Diameter external air intake | Ø 80 mm |
| CO at 13% O ₂ (Carbon monoxide) / NO _x (Nitrogen oxide) | 857,0 mg/Nm ³ / 58,0 mg/MJ |
| Dust / OGC (Organic compounds) | 39,0 mg/Nm ³ / 43,0 mg/MJ |

NB: Available with door stop left or right

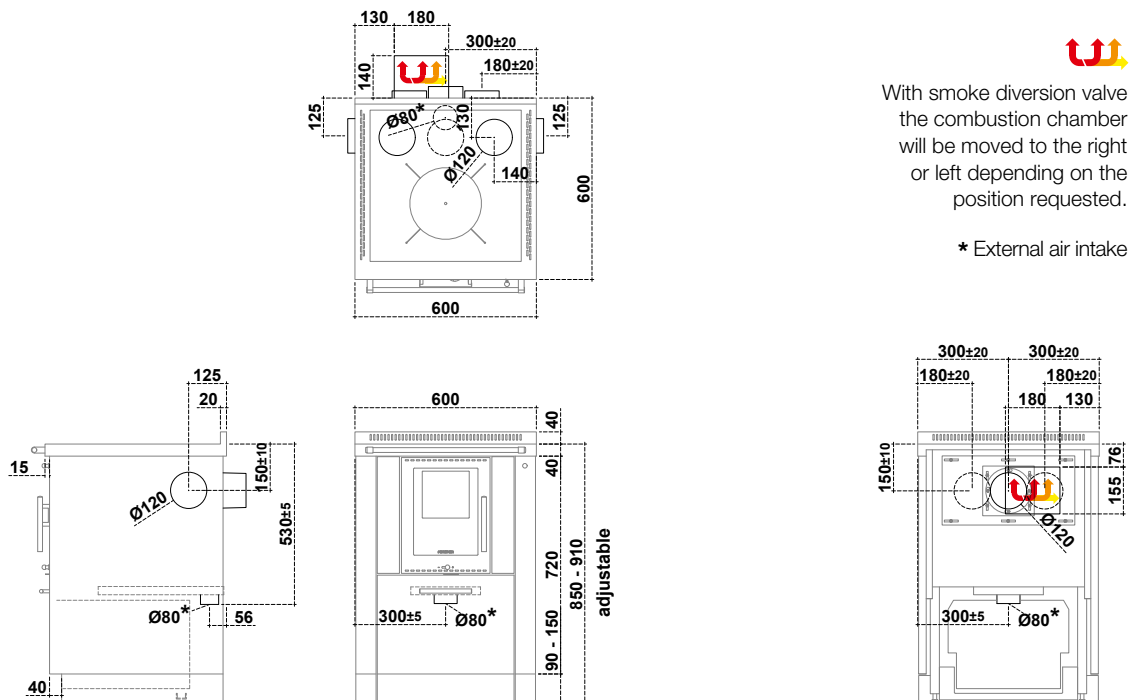

WARNING: Minimum safety distance from flammable materials

From the rear and side connection to the chimney **P= 0 + 40* mm**
 Following agreement with chimney sweep
 * 40mm of insulation with heat conductivity equal to 0.1 W/mK at 200°C

| | |
|---|---|
| On the side above the plate | L= 500 mm |
| On the side below the plate | L= 3 mm |
| Above the plate | Min. 750 mm |
| In the front from the middle of the fire door | R= 250 mm |
| Plate for floor protection | Based on specific country directives |

