


60 PREFABRICATED WOOD STOVE

Measurements (W x D x H): 600 x 600 x 480 mm
Nominal heating power: 6 kW
Heating efficiency: 80,2%
Patented adjustable multiple smoke outlet
Available with door stop left or right



TREND
Stainless steel



PANORAMA
Stainless steel




DEKOR
ST21

60 PREFABRICATED WOOD STOVE

Technical data (Data may vary depending on type of fuel used)

Fuel	Wood
Energy efficiency class	A+
Nominal heating power	6 kW
Heating efficiency	80,2 %
η_s Seasonal space heating energy efficiency	71,2 %
Diameter smoke outlet	Ø 120 mm
Minimum draught	12 Pa / 0,12 mbar
Temperature smoke outlet	265 °C
Smoke mass	8,3 g/s
CO at 13% O ₂	0,07 %
Weight	110 kg
Possible smoke outlets	8
Test report	CPD-11-025
VKF AEA1 - No.	16684
Firebox opening version Trend/Dekor (L x H)	200 x 165 mm
Firebox opening version Panorama (L x H)	205 x 180 mm
Combustion chamber (L x D x H)	210 x 330 x 260 mm
Drawer (L x D x H)	-
Oven (L x D x H)	-
Hob (L x D)	450 x 460 mm
Diameter external air intake	Ø 80 mm
CO at 13% O ₂ (Carbon monoxide) / NOx (Nitrogen oxide)	857,0 mg/Nm ³ / 58,0 mg/MJ
Dust / OGC (Organic compounds)	39,0 mg/Nm ³ / 43,0 mg/MJ

NB: Available with door stop left or right
 On request with Air System fireproof protection unit (optional)
 On request with walls built and plastered (optional)

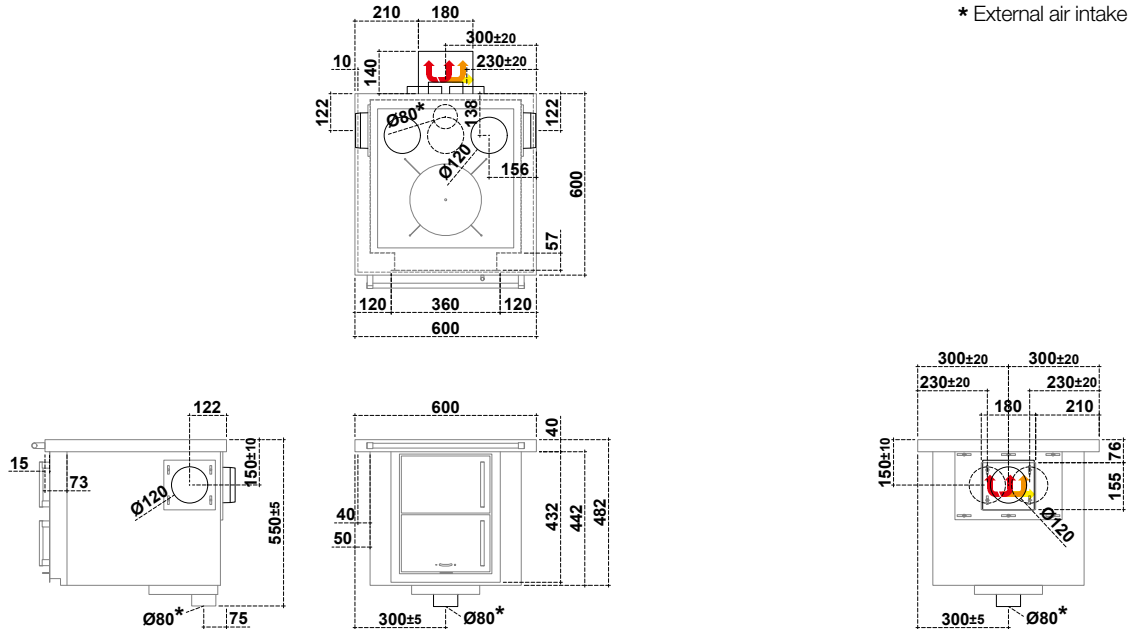

WARNING: Minimum safety distance from flammable materials

From the rear and side connection to the chimney * 40mm of insulation with heat conductivity equal to 0.1 W/mK at 200°C	P= 0 + 40* mm Following agreement with chimney sweep
On the side above the plate	L= 500 mm
On the side below the plate (only with Air System fireproof protection unit)	L= 3 mm
Above the plate	Min. 750 mm
In the front from the middle of the fire door	R= 250 mm
Plate for floor protection	Based on specific country directives

