

60 HEATING STOVE

Technical data (Data may vary depending on type of fuel used)

Fuel	Wood
Energy class	A+
Water volume in boiler	16 l
Heating capacity	15 kW
Heating capacity H ₂ O	10 kW
Performance	86,7 %
Diameter smoke outlet	Ø 150 mm
Minimum draught	12 Pa / 0,12 mbar
Temperature smoke outlet	160 °C
Smoke mass	19,6 g/s
CO at 13%O ₂	0,06 %
Weight	210 kg
Optional chimney outlets	8
Maximum water pressure	3 bar
Maximum operating pressure	95 °C
Power voltage	230 / 12V - 50 / 60Hz
Test report	VFH-12-012-P
VKF AEAI - No.	23330
Firebox opening (B x H)	205 x 270 mm
Firebox measurements (L x D x H)	240 x 300 x 330 mm
Drawer measurements (L x D x H)	335 x 420 x 140 mm
Oven (L x D x H)	-
Cooking hob (L x D)	500 x 500 mm
External air intake	Ø 80 mm
CO at 13% O ₂ (Carbon monoxide) / NO _x (Nitrogen oxide)	773,0 mg/Nm ³ / 158,0 mg/Nm ³
Dust / OGC (Organic compounds)	31,0 mg/Nm ³ / 48,0 mg/Nm ³






WARNING: Minimum safety distance from flammable materials

From the rear and side connection to the chimney	P= 0 + 40* mm
* 40mm of insulation with heat conductivity equal to 0.07 W/mK at 200°C	Following agreement with chimney sweep
On the side above the plate	L= 500 mm
On the side below the plate	L= 3 mm
Above the plate	Min. 750 mm
In the front from the middle of the fire door	R= 250 mm
Plate for floor protection	Based on specific country directives

NB: Available in right and left version



To operate the electronic control unit, install a Schuko socket either a) behind the wood drawer at a maximum height of 130mm from the floor, or b) at a maximum distance from the kitchen stove of 500 mm

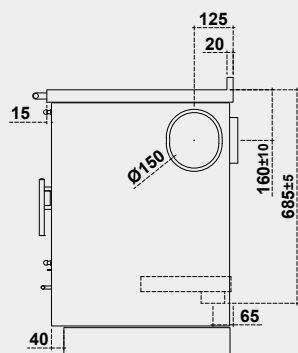

Ein Unternehmen aus
SÜDTIROL