

90 PELLET STOVE

Technical data (Data may vary depending on type of fuel used)

| | |
|---|--|
| Fuel | Pellet |
| Energy class | A+ |
| Heating capacity | 2.6 - 9 kW / 1988 - 6880 Kcal |
| Performance | 91 % |
| Diameter smoke outlet | Ø 80 mm |
| Minimum draught | 10 Pa / 0.10 mbar |
| Temperature smoke outlet | 145 °C |
| Smoke mass | 7.6 g/s |
| CO at 13% O ₂ | 0.02 % |
| Weight | 230 kg |
| Optional smoke outlet | 4 |
| Test report | CPR-16-032 |
| VKF AEA1 - No. | 27107 |
| Pellet tank | 22 kg |
| Pellet consumption | 0.6 - 2.1 kg /h |
| Autonomy | 10 - 36 h |
| Energy consumption Standby / Power 1 / Power 5 | 4 / 32-57 / 60-85 W/h |
| Oven (L x D x H) | 345 x 420 x 265 mm |
| Cooking hob (L x D) | 800 x 500 mm |
| External air intake | Ø 40 mm |
| CO at 13% O ₂ (Carbon monoxide) / NO _x (Nitrogen oxide) | 245.0 mg/Nm ³ / 61.0 mg/Nm ³ |
| Dust / OGC (Organic compounds) | 7.0 mg/Nm ³ / 3.0 mg/MJ |






WARNING: Minimum safety distance from flammable materials

| | |
|---|---|
| From the rear and side connection to the chimney * 40mm of insulation with heat conductivity equal to 0.07 W/mK at 200°C | P= 0 + 40* mm Following agreement with chimney sweep |
| On the side above the plate | L= 400 mm |
| On the side below the plate | L= 3 mm |
| Above the plate | Min. 750 mm |
| In the front from the middle of the fire door | R= 250 mm |
| Plate for floor protection | Based on specific country directives |

NB: Available only in right-hand version



For the version with the oven light, install a Schuko socket either "A" behind the wood drawer at a maximum height of 320mm from the floor, or "B" at a maximum distance from the kitchen stove of 500 mm

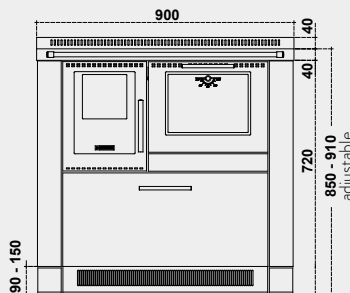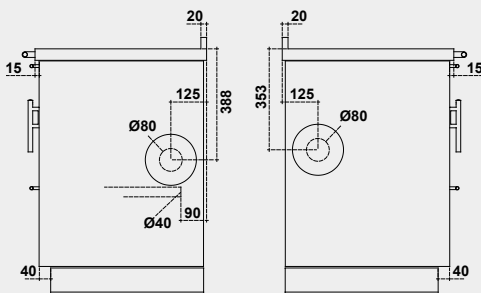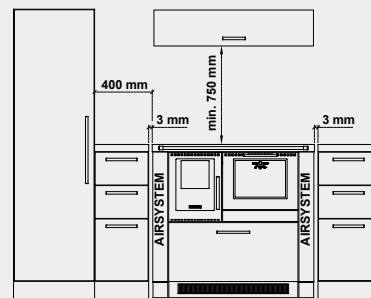

Ein Unternehmen aus
südtirol