

100XL PREFABRICATED

Technical data (Data may vary depending on type of fuel used)

Fuel	Wood
Energy class	A+
Heating capacity	8 kW
Performance	83,8 %
Diameter smoke outlet	Ø 120 mm
Minimum draught	12 Pa / 0,12 mbar
Temperature smoke outlet	212 °C
Smoke mass	6,6 g/s
CO at 13%O ₂	0,11 %
Weight	210 kg
Optional smoke outlet	5
Test report	C-1076392-1 rev.01
VKF AEA1 - No.	16685
Firebox opening Trend/Dekor version (L x H)	200 x 165 mm
Firebox opening Panorama version (L x H)	205 x 180 mm
Firebox measurements (L x D x H)	255 x 400 x 260 mm
Drawer measurements (L x D x H)	-
Oven (L x D x H)	400 x 420 x 265 mm
Cooking hob (L x D)	850 x 460 mm
External air intake	Ø 80 mm
CO at 13% O ₂ (Carbon monoxide) / NO _x (Nitrogen oxide)	1363,0 mg/Nm ³ / 52,0 mg/Nm ³
Dust / OGC (Organic compounds)	39,0 mg/Nm ³ / 49,0 mg/Nm ³






WARNING: Minimum safety distance from flammable materials

From the rear and side connection to the chimney * 40mm of insulation with heat conductivity equal to 0.07 W/mK at 200°C	P= 0 + 40* mm Following agreement with chimney sweep
On the side above the plate	L= 400 mm
On the side below the plate (only with Air System fireproof protection unit)	L= 3 mm
Above the plate	Min. 750 mm
In the front from the middle of the fire door	R= 250 mm
Plate for floor protection	Based on specific country directives

NB: Available in right and left version
 On request with Air System fireproof protection unit (optional)
 On request with walls built and plastered (optional)



To operate the oven light, install a Schuko socket either "A" behind the wood drawer at a maximum height of 130mm from the floor, or "B" at a maximum distance from the kitchen stove of 500 mm (the oven light switch must be fitted by the installer).

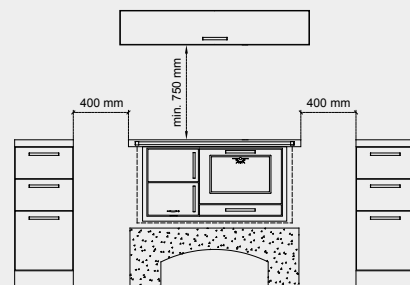

Ein Unternehmen aus
SÜDTIROL