

# 60BUXL ÖKOALPIN

## Technical data (Data may vary depending on type of fuel used)

|   |  |
|---|--|
| Fuel  | Wood                                   |
| Energy class  | A+                                     |
| Heating capacity  | 8 kW / 6880 kcal                       |
| Performance   | 85,1 %                                 |
| Diameter smoke outlet   | Ø 120 mm                               |
| Minimum draught   | 12 Pa / 0.12 mbar                      |
| Temperature smoke outlet  | 270 °C                                 |
| Smoke mass  | 8.0 g/s                                |
| CO at 13% O <sub>2</sub>  | 0.11 %                                 |
| Weight  | 165 kg                                 |
| Optional smoke outlet   | 8                                      |
| Test report   | C-944397-1                             |
| VKF AEAI - No.  | 22974                                  |
| Firebox opening (L x H)   | 270 x 150 mm                           |
| Firebox measurements (L x D x H)  | 275 x 350 x 210 mm                     |
| Drawer measurements (L x D x H)   | -                                      |
| Oven (L x D x H)  | 345 x 420 x 250 mm                     |
| Cooking hob (L x D)   | 500 x 500 mm                           |
| External air intake   | Ø 80 mm                                |
| CO at 13% O <sub>2</sub> (Carbon monoxide) / NO <sub>x</sub> (Nitrogen oxide) | 1354.0 mg/Nm <sup>3</sup> / 56.0 mg/MJ |
| Dust / OGC (Organic compounds)  | 39.0 mg/Nm <sup>3</sup> / 30.0 mg/MJ   |






## WARNING: Minimum safety distance from flammable materials

|   |   |
|---|---|
| From the rear and side connection to the chimney<br>* 40mm of insulation with heat conductivity equal to 0.07 W/mK at 200°C | P= 0 + 40* mm<br>Following agreement with chimney sweep |
| On the side above the plate   | L= 500 mm   |
| On the side below the plate   | L= 3 mm   |
| Above the plate   | Min. 750 mm   |
| In the front from the middle of the fire door   | R= 250 mm   |
| Plate for floor protection  | Based on specific country directives                    |

**NB:** Available in right and left version



To operate the oven light, install a Schuko socket either a) behind the wood drawer at a maximum height of 130mm from the floor, or b) at a maximum distance from the kitchen stove of 500 mm

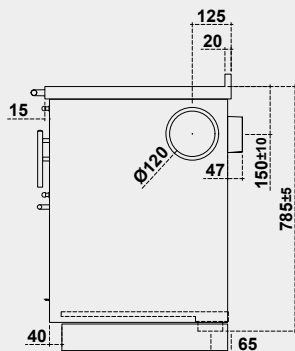

Ein Unternehmen aus  
**SÜDTIROL**