

90 VINTAGE

WOOD STOVE



Measurements (W x D): 900 x 640 mm (customized height)
Nominal heating power: 8 kW
Heating efficiency: 83,8%
Patented adjustable multiple smoke outlet
Available with oven right or left



Optional



PANORAMA (optional)
DEKOR Vintage



DEKOR Vintage




90 VINTAGE

WOOD STOVE

Technical data (Data may vary depending on type of fuel used)

Fuel	Wood
Energy efficiency class	A+
Nominal heating power	8 kW
Heating efficiency	83,8 %
η_s Seasonal space heating energy efficiency	74,8 %
Diameter smoke outlet	Ø 120 mm
Minimum draught	12 Pa / 0,12 mbar
Temperature smoke outlet	212 °C
Smoke mass	6,6 g/s
CO at 13%O ₂	0,11 %
Weight	195 kg
Possible smoke outlets	5
Test report	C-1076392-1 rev.01
VKF AEA I - No.	16685
Firebox opening version Trend/Dekor (L x H)	200 x 165 mm
Firebox opening version Panorama (L x H)	205 x 180 mm
Combustion chamber (L x D x H)	255 x 400 x 260 mm
Drawer (L x D x H)	-
Oven (L x D x H)	300 x 420 x 265 mm
Hob (L x D)	750 x 460 mm
Diameter external air intake	Ø 80 mm
CO at 13% O ₂ (Carbon monoxide) / NO _x (Nitrogen oxide)	1363,0 mg/Nm ³ / 52,0 mg/Nm ³
Dust / OGC (Organic compounds)	39,0 mg/Nm ³ / 49,0 mg/Nm ³

NB: Available with door stop left or right

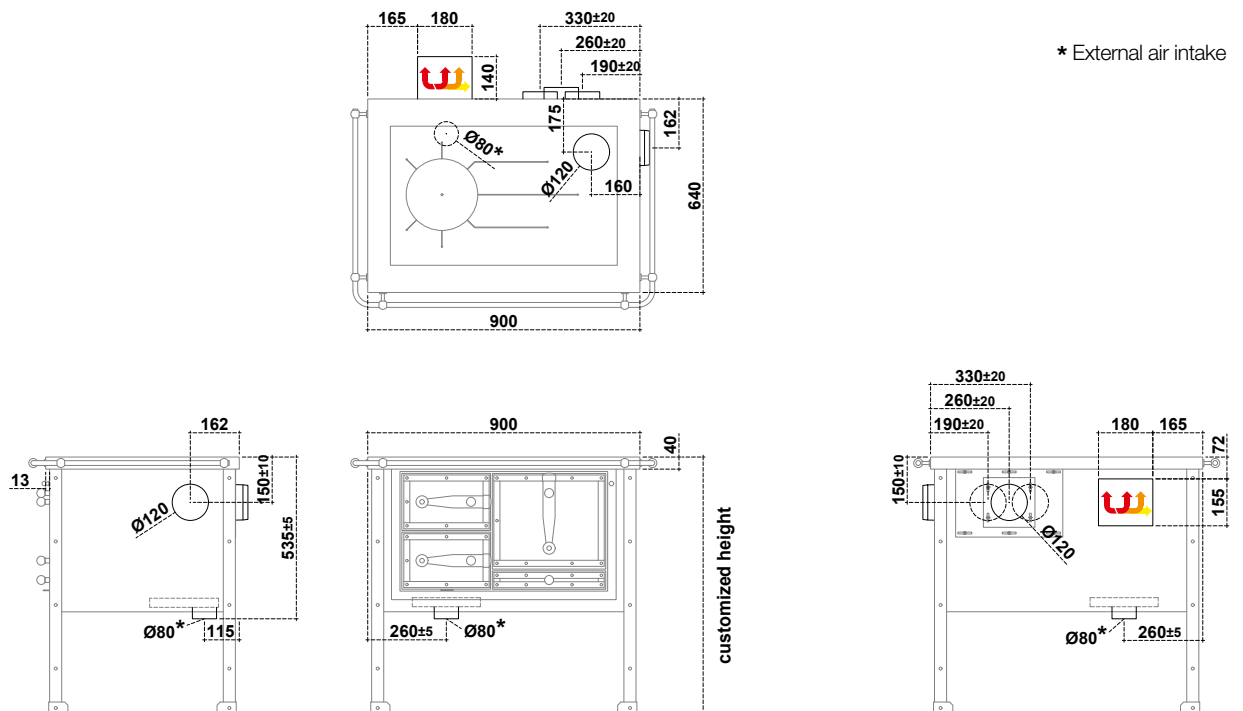

WARNING:

Minimum safety distance from flammable materials

From the rear and side connection to the chimney

$P = 0 + 40^* \text{ mm}$

Following agreement with chimney sweep

* 40mm of insulation with heat conductivity equal to 0.07 W/mK at 200°C

On the side above the plate

$L = 400 \text{ mm}$

On the side below the plate

$L = 3 \text{ mm}$

Above the plate

$\text{Min. } 750 \text{ mm}$

In the front from the middle of the fire door

$R = 250 \text{ mm}$

Plate for floor protection

Based on specific country directives

