

40 ÖKOALPIN

WOOD STOVE



Measurements (W x D x H): 400 x 600 x 850-910 mm
Nominal heating power: 6 kW
Heating efficiency: 80,2%
Patented adjustable multiple smoke outlet
Available with door stop left or right



TREND
Stainless steel



PANORAMA
Black silver F1



PANORAMA
Anthracite F9
Reinforcement Anthracite F9 (optional)



40 ÖKOALPIN


WOOD STOVE

Technical data (Data may vary depending on type of fuel used)

Fuel	Wood
Energy efficiency class	A+
Nominal heating power	6 kW
Heating efficiency	80,2 %
η_s Seasonal space heating energy efficiency	71,2 %
Diameter smoke outlet	Ø 120 mm
Minimum draught	12 Pa / 0,12 mbar
Temperature smoke outlet	265 °C
Smoke mass	8,3 g/s
CO at 13% O ₂	0,07 %
Weight	100 kg
Possible smoke outlets	6
Test report	CPD-11-025
VKF AEA1 - No.	16684
Firebox opening version Panorama (L x H)	165 x 140 mm
Combustion chamber (L x D x H)	175 x 340 x 215 mm
Drawer (L x D x H)	150 x 420 x 290 mm
Oven (L x D x H)	-
Hob (L x D)	300 x 500 mm
Diameter external air intake	Ø 80 mm
CO at 13% O ₂ (Carbon monoxide) / NOx (Nitrogen oxide)	857,0 mg/Nm ³ / 58,0 mg/MJ
Dust / OGC (Organic compounds)	39,0 mg/Nm ³ / 43,0 mg/MJ

NB: Available with door stop left or right

* External air intake

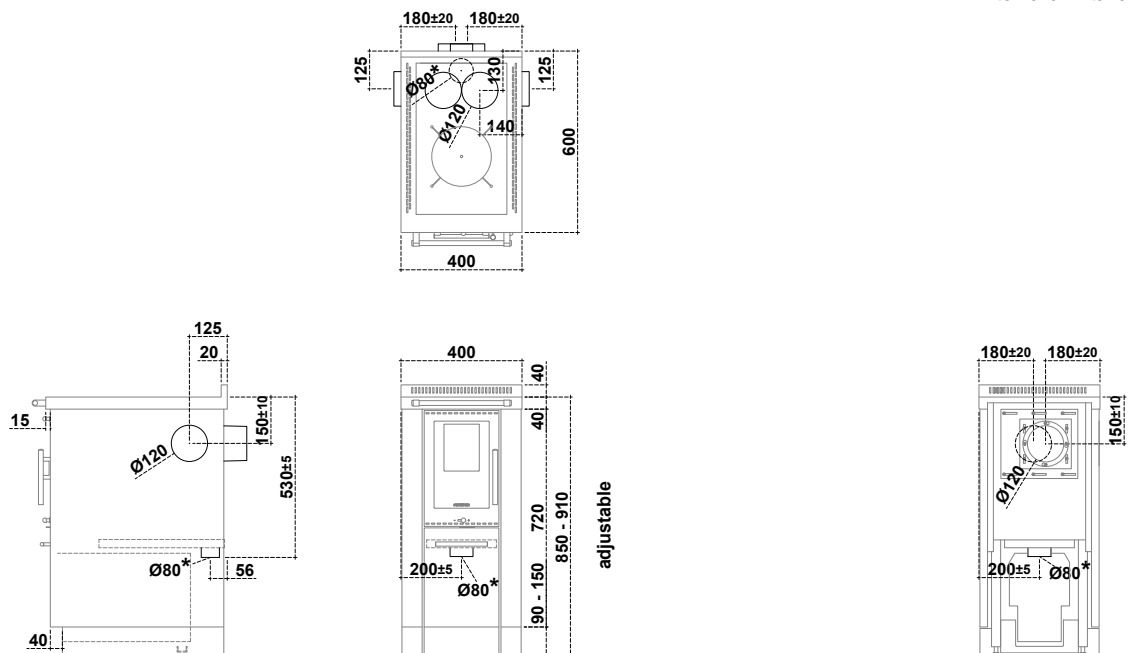

WARNING:

Minimum safety distance from flammable materials

From the rear and side connection to the chimney

P= 0 + 40* mm

Following agreement with chimney sweep

* 40mm of insulation with heat conductivity equal to 0.1 W/mK at 200°C

On the side above the plate

L= 500 mm

On the side below the plate

L= 3 mm

Above the plate

Min. 750 mm

In the front from the middle of the fire door

R= 250 mm

Plate for floor protection

Based on specific country directives

